



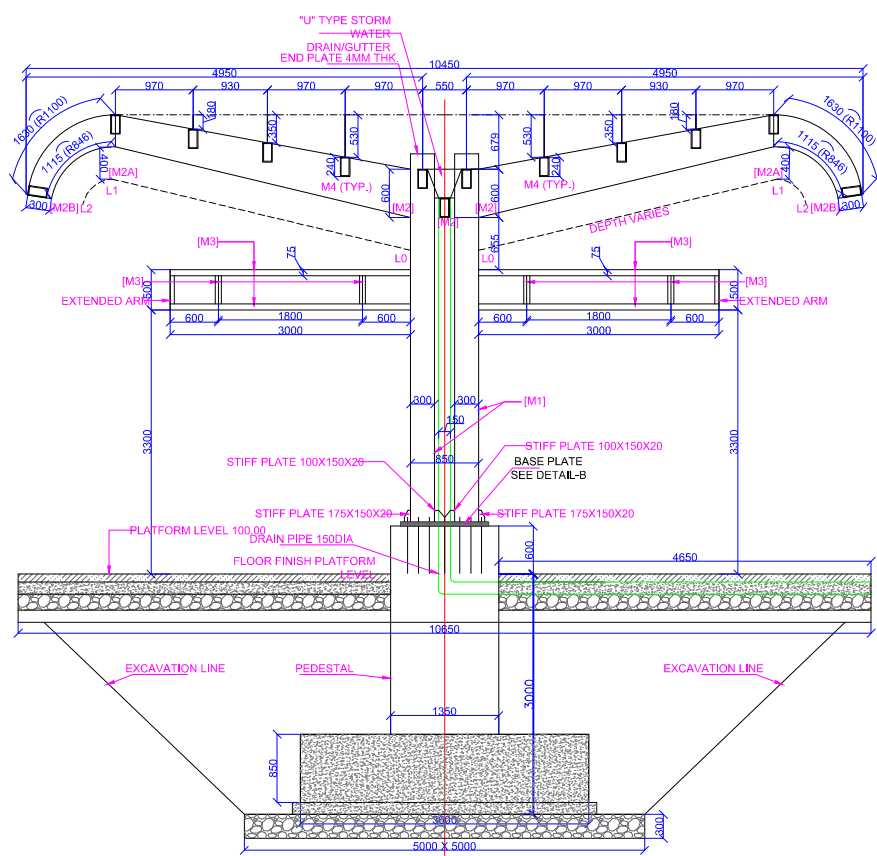


DESIGN C.O.P. SECTION FOR 12.00M SPAN WITH OUT O.H.E

MEMBER SIZE FOR 12.00M SPAN				
ITEM NO.	D	W	t	GRADE
M1	300	250	10	E-350
M2	600	200	10	E-350
M2 REDUCED TO M2A (L0 TO L1)				
M2A	400	200	10	E-350
M2A REDUCED TO M2B (L1 TO L2)				
M2B	300	200	10	E-350
M3	75	75	3.2	E-350
M4	240	120	5	E-350
M5	63.5	63.5	3.6	E-350

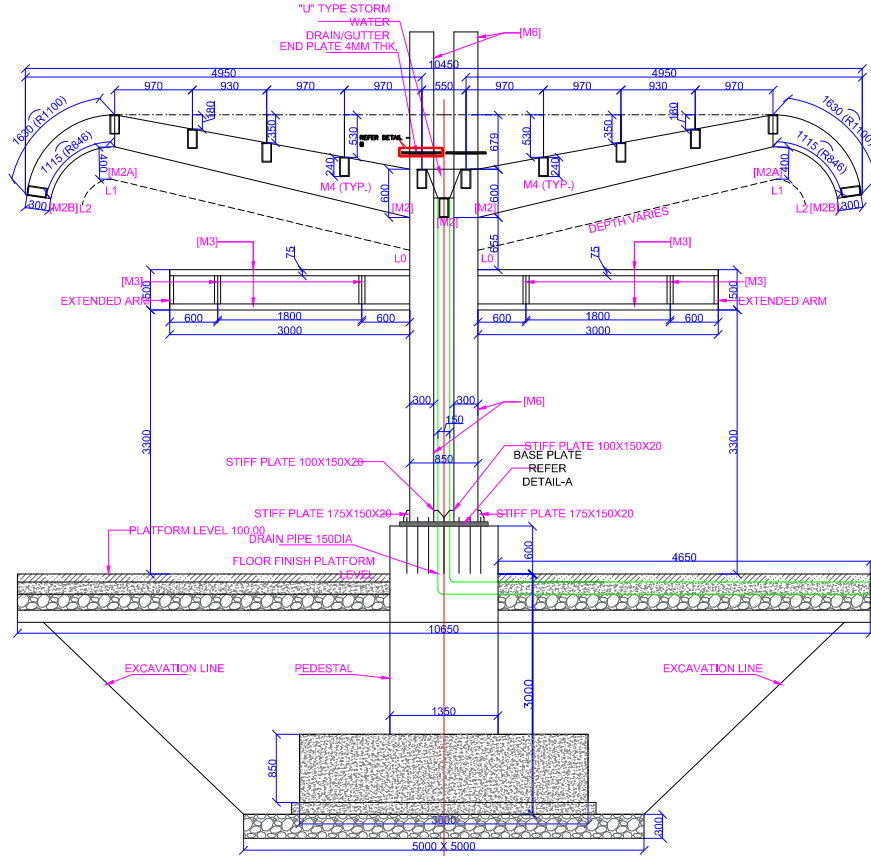

DESIGN C.O.P. SECTION FOR 12.00M SPAN WITH O.H.E

MEMBER SIZE FOR 12.00M SPAN WITH O.H.E				
ITEM NO.	D	W	t	GRADE
M1	300	250	10	E-350
M2	600	200	10	E-350
M6	300	250	12	E-350
M2 REDUCED TO M2A (L0 TO L1)				
M2A	400	200	10	E-350
M2A REDUCED TO M2B (L1 TO L2)				
M2B	300	200	10	E-350
M3	75	75	3.2	E-350
M4	240	120	5	E-350
M5	63.5	63.5	3.6	E-350

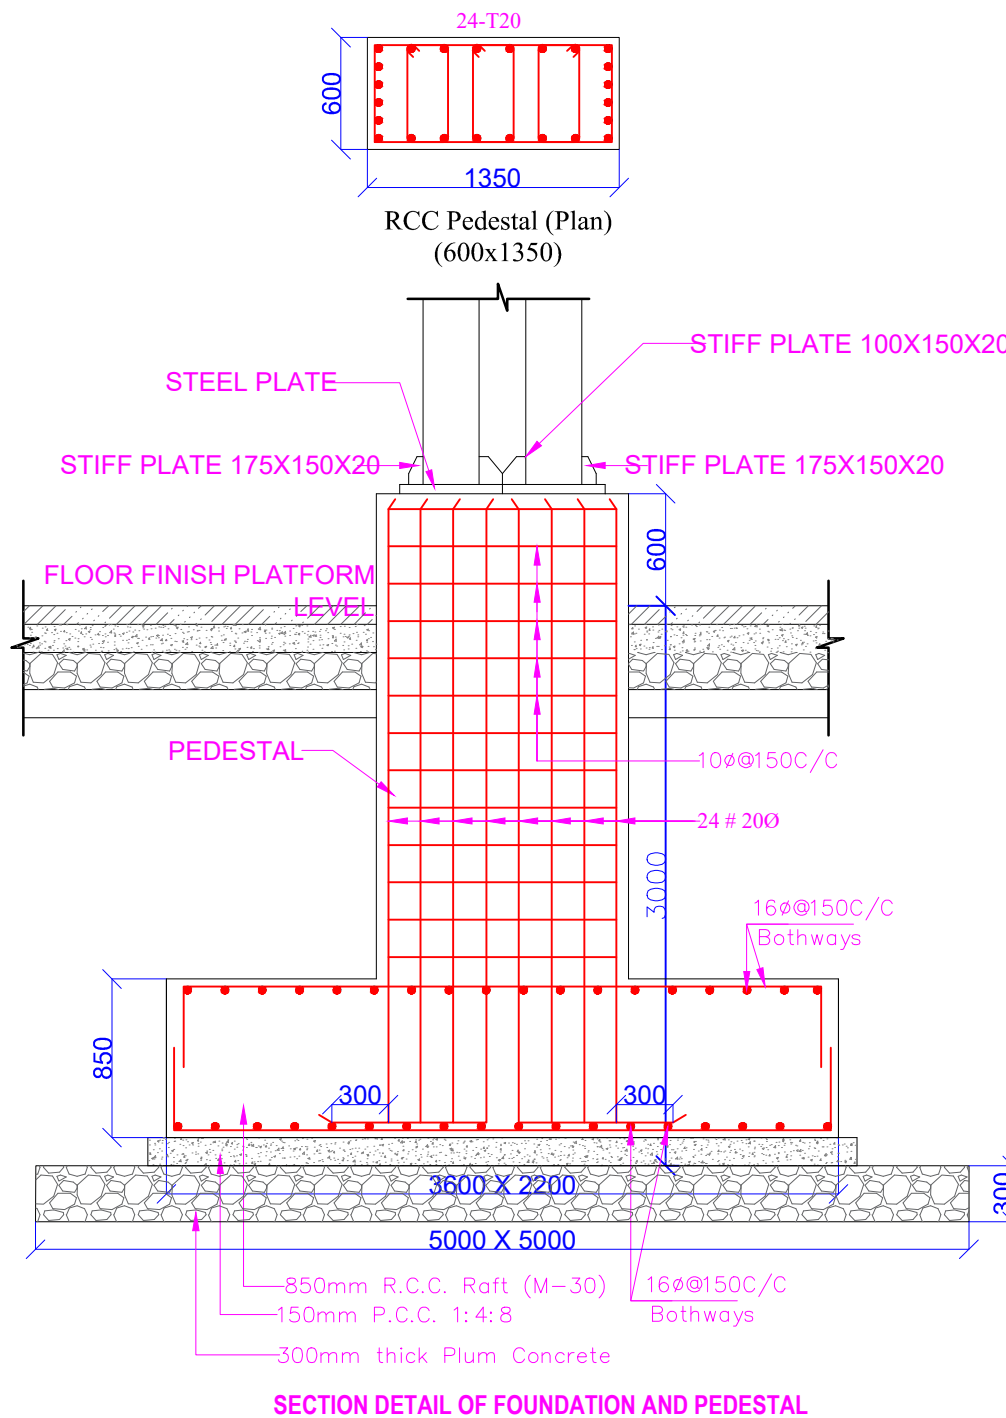

SECTION DETAIL OF FOUNDATION AND PEDESTAL

- NOTES:-
- WELD ELECTRODES SHALL BE AS PER IS 814
 - WELD PROCEDURE SHALL BE AS PER IS 816.
 - BOLTS SHALL BE GR. 8.8 HSFG (CONFIRM TO IS:1367). THREADING SHALL BE DONE FOR FIXING OF NUT AND WASHER ETC.
 - SHOP DRAWNS SHALL BE PREPARED BY CONTRACTOR.
 - ADDITIONAL NRACING DETAILS SHALL BE ADDED BASED ON LAUNCHING METHODOLOGY.
 - BUTT WELD OF 10MM(MAX TO PLATE THICKNESS) SHALL BE ADOPTED WHEREVER BOTH SIDES ARE ACCESSIBLE FOR FILLET WELD.

- NOTES:-
- DIMENSIONS ARE NOT TO BE SCALED.
 - CONTRACTOR MUST VERIFY ALL DIMENSIONS AT SITE BEFORE COMMENCEMENT OF ANY WORK.
 - CONTRACTOR MUST NOTIFY ARCHITECT AND/OR PROJECT MANAGER OF ALL DISCREPANCIES IN THE DRAWING.
 - ALL LEVELS GIVEN ARE FINISHED FLOOR LEVELS UNLESS MENTIONED OTHERWISE.
 - REFER THIS DRAWING ALONG WITH THE OTHER RELEVANT ARCHITECTURAL, STRUCTURAL & OTHER SERVICES DRAWINGS, BEFORE THE EXECUTION OF WORK, RELATED TO THIS DRAWING AT SITE.
 - ALL DIMENSIONS ARE IN MM (U.N.O.).
 - DO NOT SCALE ANY DIMENSION. ALWAYS FOLLOW WRITTEN DIMENSIONS.
 - ALL R/F SHALL BE Fe 500 CONFORMING TO IS 1786 & ALL OTHER RELEVANT CODE 13920, IS:456 (LATEST REVISION)
 - THE FOLLOWING GRADES OF CONCRETE SHALL BE USED AS PER IS:456 GRADE M30 FOUNDATION, M30 PEDESTAL, M10 P.C.C
 - MINIMUM CLEAR COVER OF CONCRETE TO REINFORCEMENT SHOULD BE AS UNDER:-PILE CAPS:- BOTTOM=100MM, SIDE FACE & TOP=75MM FOUNDATIONS :- 50MM PEDESTALS :- 40MM
 - CHARACTERISTIC STRENGTH OF CONCRETE REFERS TO 28 DAYS COMPRESSIVE STRENGTH.
 - DESIGN HAS BEEN DONE AS PER IS:13920-2016.
 - THIS BUILDING HAS BEEN DESIGNED FOR SEISMIC ZONE-2
 - WATER USED FOR CONSTRUCTION PURPOSE SHALL BE AS PER IS:456-2000.
 - ALL STRUCTURAL LEVEL SHALL BE CROSS CHECKED WITH RELEVANT ARCHITECTURAL DRAWING
 - ALWAYS REFER TO THE LATEST REVISION OF THE DRAWINGS.
 - GENERAL NOTES SHALL BE REFERED IN CONJUNCTION WITH THIS DRAWING.

- NOTES:-
- WELD ELECTRODES SHALL BE AS PER IS 814
 - WELD PROCEDURE SHALL BE AS PER IS 816.
 - BOLTS SHALL BE GR. 8.8 HSFG (CONFIRM TO IS:1367). HREADING SHALL BE DONE FOR FIXING OF NUT AND WASHER ETC.
 - SHOP DRAWNS SHALL BE PREPARED BY CONTRACTOR.
 - ADDITIONAL NRACING DETAILS SHALL BE ADDED BASED ON LAUNCHING METHODOLOGY.
 - BUTT WELD OF 10MM(MAX TO PLATE THICKNESS) SHALL BE ADOPTED WHEREVER BOTH SIDES ARE ACCESSIBLE FOR FILLET WELD.

- GENERAL NOTES FOR DRAWINGS OF REDEVELOPMENT OF KOTA STATION:
- All 43 notes (General Notes on drawings of Redevelopment of Kota Station uploaded with the tender) mentioned in the master plan drawing shall be applicable for all drawings.
 - The design has been done for a peak hourly traffic (PHT) of 7300 and checked for unusual traffic (mela rush) of 9835 as per provisions of manual of standard and specification for railway station.
 - The plan has been prepared to ensure:
 - Segregation of arrival/ departure passengers except at platforms separate lanes for drop-offs pickups and logical, conflict-free movements to the maximum extent possible.
 - Compliance with requirements for accessibility as per laid down guidelines.
 - Sustainability features including green building certification, SSSSSS wherever required, energy efficient construction in design, on-site renewable energy generation etc.
 - The contractor shall not start any work without necessary approval of general arrangement drawings to be obtained after detailed engineering by contractor. approval of commissioner of railways safety shall be obtained wherever required.
 - The contractor approach railway for grant of any speed Restrictions, blocks etc. once the detailed design and scheme for execution is submitted and any work shall be taken up only after the same is approved at appropriate level.
 - Any demolition of facilities shall be taken up only after providing suitable alternative temporary/ permanent arrangements for the functions performed by the facilities.
 - While executing the work, contractor shall ensure safety of passengers as well as trains and observe all precautions as per IRPMM/ ACTM/ APPLICABLE manuals and ensure that the instructions for working near railway tracks.
 - All statutory approvals shall be obtained from concerned authorities before start of work.
 - All the live working S&T cables at platform along with at other locations where s&t cable are available are to be shifted or protected taking care the cables/joints are not damaged in any manner and railway operations are not affected due to the same.
 - All the offices/amenities planned for dismantle shall be suitably relocated.
 - All the existing O.H.E. mast/portals, electric poles, coach guidance post, cop and column etc. which is infringing and required to be removed during construction and should be shifted suitably by the contractor as per IRSOD.
 - All existing underground/overhead s&t & electrical cables, water pipe lines, sewer line and drainage line & drains should be suitably relocated.

WEST CENTRAL RAILWAY		KOTA DIVISION	
DIVISION SIGNATURE		H.Q. SIGNATURE	
DRM/KOTA		CE/SD/WCR	
ADRM IN/RA KOTA		DY CE/SD/WCR	
SR. DEN/CO/KOTA		CEE (EEM)/WCR	
SR. DEN/SD/KOTA		CSTE/PROJ/WCR	
SR. DOM/KOTA		CCMPS/WCR	
SR. DCM/KOTA		CPM-H/SSU/KOTA	
SR. DEE/SG/KOTA		SSR/W/SD/KOTA	
SR. OSTE/Co/KOTA			
SR. DEETRO/KOTA			
SR. DEN/E/KOTA		JE/DRG/WQ/IBP	
ADEN/SD/KOTA		DRAWING NO.	

R2	28-08-2025	WCR	DFA	AS PER CEMOSA LT NO 2006
R1	17-07-2025	WCR	DFA	HEIGHT CHANGES TO 4800 MM
R0	09-07-2025	WCR	DFA	FOR APPROVAL
REVISION	DATE	ISSUED TO	BY	REMARKS



PROJECT: MAJOR UPGRADE OF KOTA RAILWAY STATION OF ENGINEERING PROCUREMENT AND CONSTRUCTION (EPC) MODE

CONSULTANT: MASTERPLANNING | ARCHITECTURE | DESIGN




Advant IT Park Tower-B, Unit-602
Sector-142 Expressway Noida-201301.
TEL: 0120-4601000 E-MAIL: rajiv@dfa.in


STAMP SIGN DESIGN DIRECTOR	MEP HEAD	STRUCTURE HEAD
AR. RAJIV GANDHI	ER. PUNIT SHARMA	ER. RAVI SHANKAR

STAGE	DRAWN BY	CHECKED BY	NORTH
DESIGN DEFINITIVE WORKING	d.s	Y.S.	
	SCALE @ A1	DATE OF ISSUE:	
	1:50	08.06.2025	


COVER OVER PLATFORM	ARCH
20040-AR-RLO-SD-DWG-100	REV. NO :
	R0

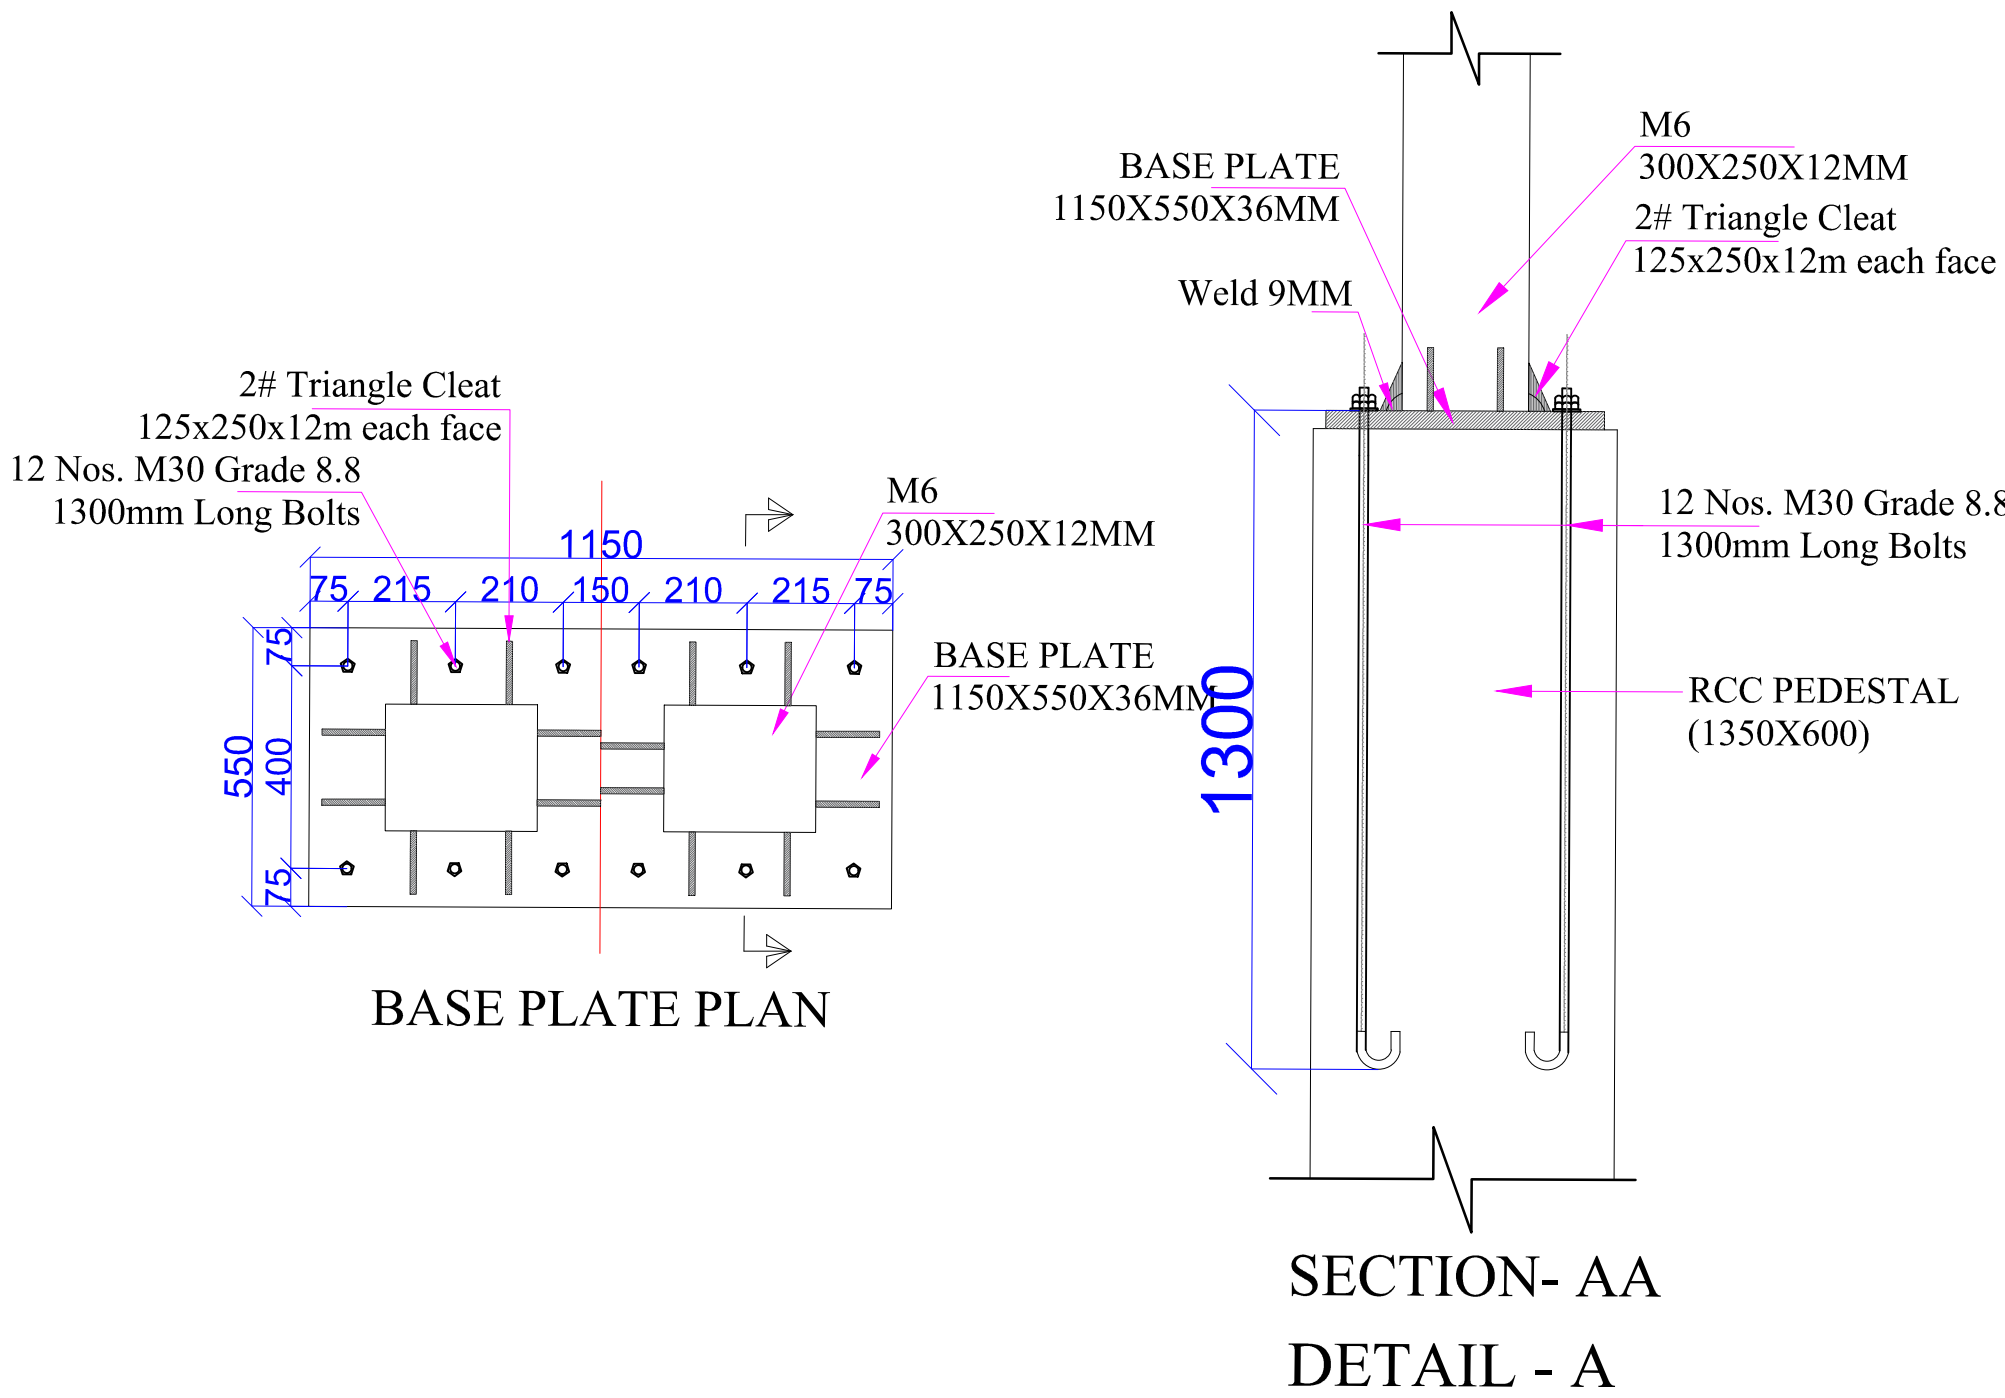

SECTION- AA
DETAIL - A

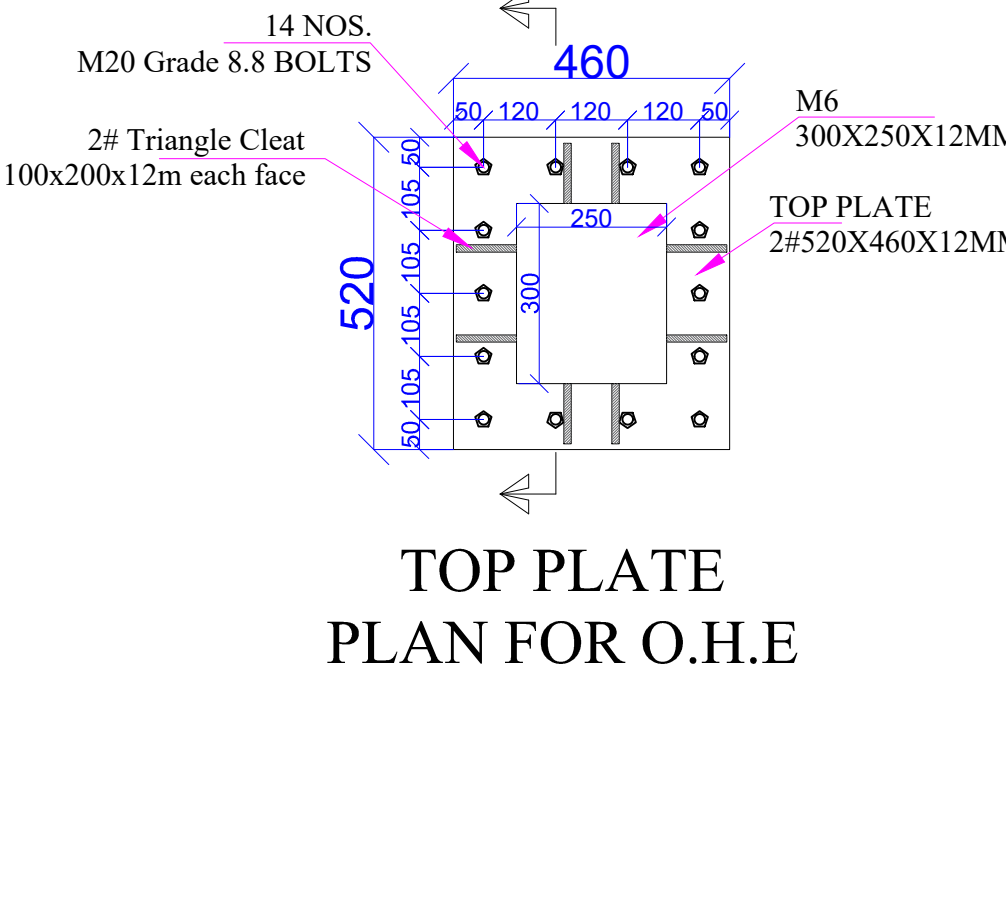

TOP PLATE
PLAN FOR O.H.E

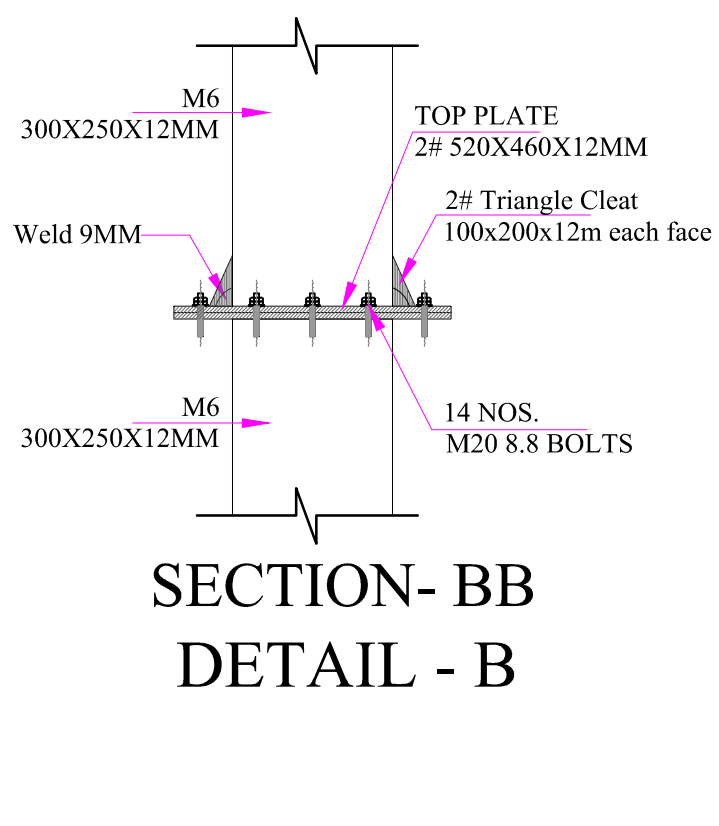

SECTION- BB
DETAIL - B